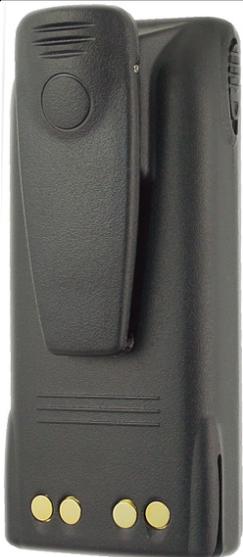


LMR BATTERY SPECIFICATIONS	PART NUMBER
	BP9009HC

COMPATIBLE RADIOS	Motorola HT750, HT1250, HT1550, PRO5150, PRO7150, PRO9150, GP320, GP340, GP360, GP380, GP640, GP680, GP1280, MTX850, MTX850LS, MTX900, MTX950, MTX8250LS, MTX9250
ALTERNATIVE TO	HNN9009AR
COMPATIBLE CHARGERS	Endura EC1-MT2, EC1M-MT2, EC6M-MT2, EC2M-MT2-D, EC12M-MT2-D / Motorola PMLN5197A, PMPN4285
VOLTAGE	7.5V
CAPACITY	2700 mAh
CHEMISTRY / CELL TYPE	NiMh / FDK HR-AUE
OPERATING TEMPERATURE	0° C to +50° C (discharge) / 0° C to +40° C (charge)
CHARGE CYCLES	>300
CHARGE TYPE	Rapid or trickle
CONDITIONER COMPATIBLE	Yes
THERMAL PROTECTION	Yes
HOUSING MATERIAL	ABS
HOUSING SEAL	Ultrasonic weld
METAL WELDING	Pure nickel tabs w/ spot welder
CLIP	Included (CL9008)
WARRANTY	12 months
PRODUCT PHOTO	 <div style="border: 1px dashed black; padding: 10px; margin-left: auto; margin-right: auto; width: fit-content;"> <p>Dimensions (HxWxD): 4.85" x 2.20" x 0.87" 123.3 x 55.9 x 22.1 mm</p> <p>Weight 0.60 lbs. / 273 g</p> </div>