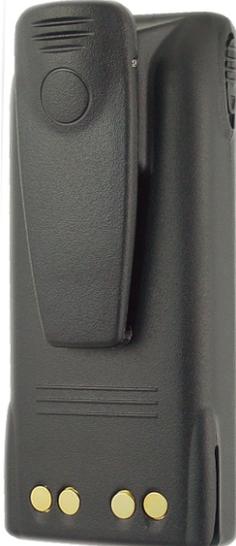


LMR BATTERY SPECIFICATIONS	PART NUMBER
	PM9013LIP

COMPATIBLE RADIOS	Motorola HT750, HT1250, HT1550, PRO5150, PRO7150, PRO9150, GP320, GP340, GP360, GP380, GP640, GP680, GP1280, MTX850, MTX850LS, MTX900, MTX950, MTX8250LS, MTX9250
ALTERNATIVE TO	HNN9013 / HNN9013DR
COMPATIBLE CHARGERS	Endura EC1-MT2, EC1M-MT2, EC2M-MT2-D, EC6M-MT2, EC12M-MT2-D / Motorola PMLN5197, WPLN4182
VOLTAGE	7.4V
CAPACITY	4100 mAh / 30.3 Wh
CHEMISTRY / CELL TYPE	LiPo / PolyMax HPC
OPERATING TEMPERATURE	-10° C to +50° C (discharge) / 0° C to +45° C (charge)
CHARGE CYCLES	>300
CHARGE TYPE	Rapid
CONDITIONER COMPATIBLE	Yes (not required for battery run time or cycle life)
PROTECTION TYPES	Short circuit / over-charge / over-discharge / over-temperature monitoring via charge contact
HOUSING MATERIAL / SEAL	ABS / ultrasonic weld
METAL WELDING	Pure nickel tabs w/ spot welder
CLIP	Included
WARRANTY	24 months (capacity 80%) 24 months (materials and workmanship)
PRODUCT PHOTO	 <div style="margin-top: 20px; text-align: right;"> <p>PolyMax HPC™ Lithium Polymer • Maximum Energy</p> </div>